

1301 Westinghouse Blvd. Suite I Charlotte, NC USA 28273 Phone: +1-704-843-9292 Fax: +1-704-943-0675 support@csibathware.com www.csibathware.com

Specifications


Hand Shower HS2462 Series

- Optional single function On/Off switch
 On/Off button offers a saturating spray while in On position and a trickle while in Off position.
 Trickle (Off position) is a safety feature to release water pressure and to warn consumer to turn off the water of the surface of the water source.
- Flow rate Saturating Spray (Switch On Position)
 1.4+ GPM at 20 psi
 2.5- GPM at 80 psi
- Flow rate Trickle Spray (Switch Off Position): 0.026 0.184 GPM at 80 psi
- Thread: G1/2
- Measurements:

Face 70 mm (2.75") Length 210 mm (8.26")

- Material: ABS Plastic
- Finishes: Chrome



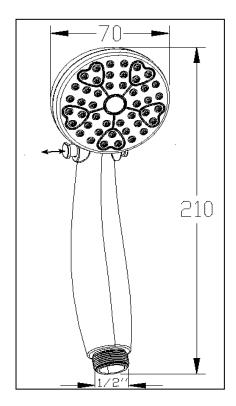

On/Off Switch - Chrome	HS2462CP

This information is subject to change without formal notice Component Sourcing International, LLC Effective Date: 11-18-18